



MML-AP***4H-E

Floor Standing Cabinet Type

Slim & compact design


Under-window mounting does not block lighting.

Indoor unit size of 2.2 kW to 7.1 kW is the same.


Air exits from front or top

Distribution can be reversed to suit occupant preference.


Air blown from front panel (factory default)



Air blown from top



MML-AP0074H-E to AP0244H-E

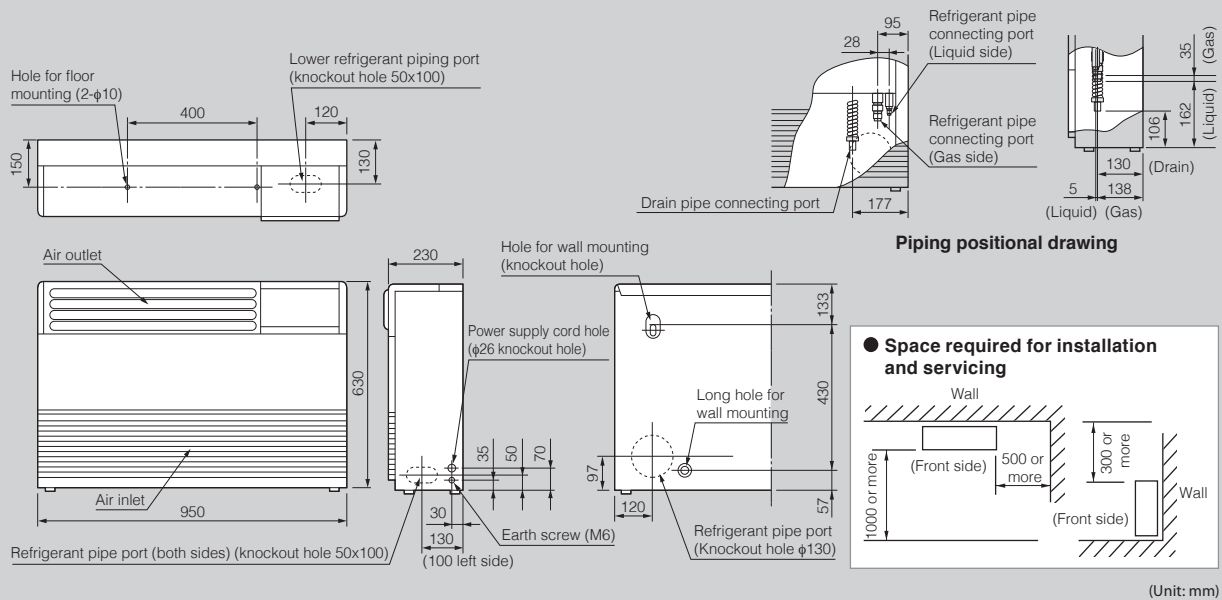

Technical specifications

Model name	MML-	AP0074H-E	AP0094H-E	AP0124H-E	AP0154H-E	AP0184H-E	AP0244H-E
Cooling/Heating capacity*1	(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)					
	Power consumption 50 Hz/60 Hz	(kW)	0.056/0.053		0.092/0.092		0.102/0.113
External dimensions	Height	(mm)	630				
	Width	(mm)	950				
	Depth	(mm)	230				
Total weight	(kg)	37				40	
Fan unit	Standard air flow (High/Mid/Low)	(m ³ /h)	480/420/360		900/780/650		1080/930/780
	Motor output	(W)	45				70
Connecting pipe	Gas side	(mm)	ø9.5		ø12.7		ø15.9
	Liquid side	(mm)	ø6.4				ø9.5
	Drain port	(nominal dia.)	20 (Polyvinyl chloride tube)				
Sound pressure level*2	(dB(A))	39/37/35		45/41/38		49/44/39	

*1 This reference piping consists of 5 m of main piping and 2.5 m of branch piping connected at the same height level.

*2 The actual values in an external operating environment are generally higher than the indicated values due to the contribution from ambient noise.